

5" Cylinder

35W LED Pendant

Round or Square


Catalog #:

Type:

Project:

Date:

Notes:

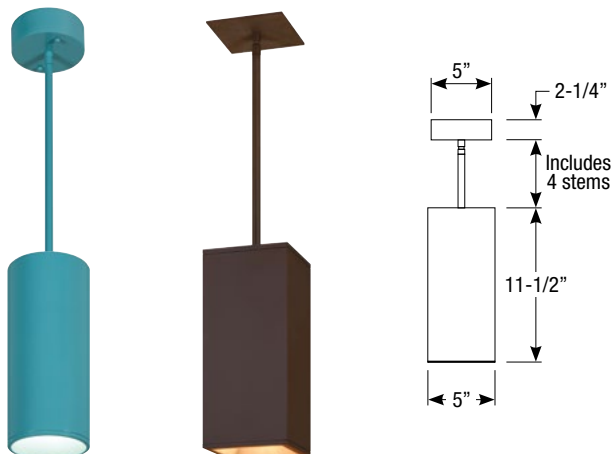

Electrical Data

CCT	CRI	Wattage	Delivered Lumens	Efficacy
2700K	90 CRI	35W	2299lm	66lpw
3000K	90 CRI	35W	2644lm	76lpw
3500K	90 CRI	35W	2644lm	76lpw
4000K	80 CRI	35W	3266lm	93lpw

Specifications

Field Replaceable LED Light Engine

- 35W LED with 2 SDCM binning (RGBW LED option also available)
- 2700K, 3000K and 3500K at 90 CRI / 4000K at 80 CRI
- 30°, 50° and 80° optics included (10° optic available, must specify)

Field Replaceable Dimming Driver

- Multiple dimming drivers available
- Power factor > 0.9, 50/60Hz

Mounting

- 4' of stem included; (1) 6", (2) 12" & (1) 18" (includes couplers)
- Contact the factory for custom sloped ceiling projects
- 10' field adjustable cord available, must specify
- 5" x 2-1/4" canopy included with standard universal dim driver (7-1/8" x 2-1/4" round canopy or 6-1/4" x 2-1/4" square canopy included with Lutron and eldoLED drivers)

Finishes

Available in 20 standard and 1 specialty finish with optional coastal coating to protect finish in coastal environments

Listing / Warranty

- Five (5) year limited warranty
- UL listed to US and Canadian standards for wet locations



Standard Finishes

- ABL** (Aegean Blue)
- BB** (Burnished Bronze)
- BK** (Gloss Black)
- BLU** (Blue)
- BZP** (Bronze Patina)
- DVG** (Dove Gray)
- FLG** (Flannel Gray)
- GWT** (Gloss White)
- HG** (Hunter Green)
- LG** (Lime Green)

Specialty Finish

- MB** (Matte Black)
- PNA** (Painted Natural Aluminum)
- PNC** (Painted Natural Copper)
- RD** (Red)
- SS** (Satin Silver)
- TBZ** (Textured Bronze)
- TGP** (Textured Graphite)
- TNG** (Tangerine)
- TTL** (Tahitian Teal)
- WT** (Semi Gloss White)
- GA** (Galvanized)

Order Matrix

5" Cylinder (Example: LP5-35-BK-1)

Series	CCT / CRI	Finish	Coastal Coating Option	Rev	Driver	Option
LP5 (Round)	-27 (2700K / 90 CRI)	-ABL (Aegean Blue)	(blank) (No coating)	-1	(blank) ² (ERP, Universal Dim, Triac/ELV/0-10V 10% 120-277V)	-BC 10' Black Cord
SLP5 (Square)	-30 (3000K / 90 CRI)	-BB (Burnished Bronze)	-C (Coating)		-L1¹ (Lutron Hi-lume® 2-Wire 1% 120V)	-WC 10' White Cord
	-35 (3500K / 90 CRI)	-BK (Gloss Black)			-L2¹ (Lutron EcoSystem® 5% 120-277V)	-LV 10' Low Voltage Aircraft Cable
	-40 (4000K / 80 CRI)	-BLU (Blue)			-L3¹ (Lutron Hi-lume® Fade-to-Black 1% 120-277V)	
		-BZP (Bronze Patina)			-L4¹ (Lutron Hi-lume® 3-Wire 1% 120-277V)	
		-DVG (Dove Gray)			-EL1¹ (eldoLED DALI 1% 120-277V)	
		-FLG (Flannel Gray)			-EL2¹ (eldoLED 0-10V 1% 120-277V)	
		-GA (Galvanized)			-EL3¹ (eldoLED DMX 1% 120-277V)	
		-GWT (Gloss White)				
		-HG (Hunter Green)				
		-LG (Lime Green)				
		-MB (Matte Black)				
		-PNA (Painted Natural Aluminum)				
		-PNC (Painted Natural Copper)				
		-RD (Red)				
		-SS (Satin Silver)				
		-TBZ (Textured Bronze)				
		-TGP (Textured Graphite)				
		-TNG (Tangerine)				
		-TTL (Tahitian Teal)				
		-WT (Semi Gloss White)				

1. Includes larger canopy
2. Forward and reverse dimming at 120V only

Emergency

- EM-1000** (25W LED Remote Inverter)
- EM-1002** (10W LED Remote Emergency Driver)

10° Optic

- EDL5-10-OPTIC-1** (10° Spot)

Revised 05/14/18