

CounterAttack LED

120V Undercabinet

Linkable Series


Catalog #:

Type:

Project:

Date:

Notes:

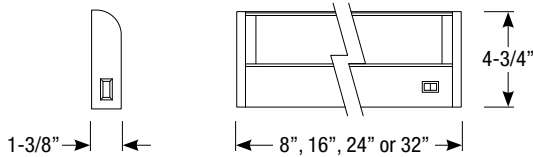

Electrical Data

Part Number	Wattage	Lumens	Efficacy
NCA-LED-8 (8")	4.5W	250lm	56lpw
NCA-LED-16 (16")	9W	500lm	56lpw
NCA-LED-24 (24")	13.5W	750lm	56lpw
NCA-LED-32 (32")	18W	1000lm	56lpw

Specifications

Description

Low profile CounterAttack series with integral electronic driver provides even illumination on all surfaces. Available in four lengths and three finishes.

LED Light Engine

- 4.5W, 9W, 13.5W or 18W LED @ 2700K at 90 CRI
- 35,000 hours at 70% lumen maintenance (L70)

Electrical

- 120V input
- Dimmable with incandescent dimmer
- Linkable up to 600W

Mounting

Includes mounting hardware (captive screws). Can be hardwired at any point along the run or plugged into receptacle with a cord and plug (ordered separately).

Housing

- Slim 1-3/8" profile
- Extruded aluminum housing
- Hinged, removable, UV coated, prismatic glass diffuser for maximum light distribution

Finishes

Available in white, bronze or stainless steel

Linkable Cables and Connectors

CounterAttack can link multiple luminaires up to 600W with male and female connectors on the ends. Linkable with 10" or 18" QuickLink interlink cables or end-to-end with seamless connectors.

On/Off Switch

CounterAttack series can be controlled from individual on/off switches or from one master switch. Master switch can be directly connected to the end of a run or moved to a discrete area with QuickLink interlink cables. (ordered separately)

Listing

UL listed to US and Canadian standards for damp locations



Order Matrix

CounterAttack Order Matrix (Example: NCA-LED-32-BZ)

Series	Length	Finish
NCA-LED	-8 (8")	-WT (White)
	-16 (16")	-BZ (Bronze)
	-24 (24")	-SS (Stainless Steel)
	-32 (32")	



QuickLink® Interlink Cables

Cable Length	Finish
QL-10 (10")	WT (White)
QL-18 (18")	BK (Black)



QuickLink® Cord and Plug

Cable Length	Finish
PL96 (96")	WT (White)
	BK (Black)



QuickLink® Master Switch (3" x 5" x 1")

Switch	Finish
CS-1	WT (White)
	BZ (Bronze)
	SS (Stainless Steel)

Revised 11/30/17