

**ProPuck Xenon**  
**120V Undercabinet**  
 Linkable Series


Catalog #:

Type:

Project:

Date:

Notes:

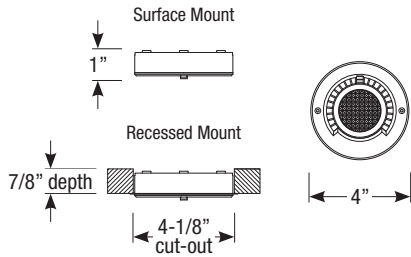

**Electrical Data**

Part Number	Wattage	Lamp	Socket
PP	20W	Xenon 2900K	G8

**Specifications**

**Description**

Slim puck lights are designed for recessed or surface mounted installations. System can be daisy chained together up to 450W.

**Lamp**

- Socket: G8 base
- Wattage: 20W Xenon (each - included)
- Color Temperature: 2900K
- Lamp Life: 7,000 hours

**Electrical**

- 120V input
- Dimmable with incandescent dimmer (must meet minimum load of dimmer)
- Linkable up to 450W

**Mounting**

Surface mount housing included with mounting hardware. May be recessed mounted for a seamless installation. For cabinet use only. Not intended for walls or ceilings.

**Housing**

- 1" surface mount housing with knockouts on sides and back
- Die-cast aluminum construction
- Metal honeycomb lens, flange for recessed mount, surface mount housing, strain relief and mounting hardware included
- Internal terminal block included, no wire nuts or connectors needed

**Finishes**

Available in white, bronze, black or satin aluminum

**Accessories**

- PP-PLG - 6' Cord and plug available in black or white
- PP-CON - 1/2" Flexible conduit connector for side knockout only
- INVWC3 - Shallow 1" low profile wiring compartment. Meets UL 2028 standards.
- PP-CRD - SJT cable for connecting luminaires, available in black or white and lengths of 10' or 100'
- 0-16 - Prismatic spread lens replaces included solite lens
- 0-18 - Mini prismatic spread lens replaces included solite lens
- 0-19 - Linear spread lens replaces included solite lens

**Listing**

UL listed to US and Canadian standards for damp locations



**Order Matrix**

**ProPuck Xenon Order Matrix** (Example: PP-BZ-1)

Series	Finish	Rev
PP (ProPuck Xenon)	<input type="checkbox"/> -WT (White)	-1
	<input type="checkbox"/> -BZ (Bronze)	
	<input type="checkbox"/> -SA (Satin Aluminum)	
	<input type="checkbox"/> -BK (Black)	



**1/2" Flexible Conduit Connector (Side Knockout)**

Part Number
<input type="checkbox"/> PP-CON (1/2" Flexible Conduit Connector)



**Wiring Compartment**

Part Number
<input type="checkbox"/> INVWC3 (Low Profile Wiring Compartment)




**6' Cord and Plug**

Cable Length	Finish
PP-PLG (6')	<input type="checkbox"/> -WT (White)
	<input type="checkbox"/> -BK (Black)



**Linking Cord (SJT cable)**

Series	Cord Length	Finish
PP-CRD	<input type="checkbox"/> (blank) (10')	<input type="checkbox"/> -WT (White)
		<input type="checkbox"/> -BK (Black)
	<input type="checkbox"/> -100 (100')	<input type="checkbox"/> -WT (White)
		<input type="checkbox"/> -BK (Black)



**Lens Accessories**

Description
<input type="checkbox"/> 0-16 (Prismatic Spread Lens)
<input type="checkbox"/> 0-18 (Mini Prismatic Spread Lens)
<input type="checkbox"/> 0-19 (Linear Spread Lens)

Revised 08/10/18

